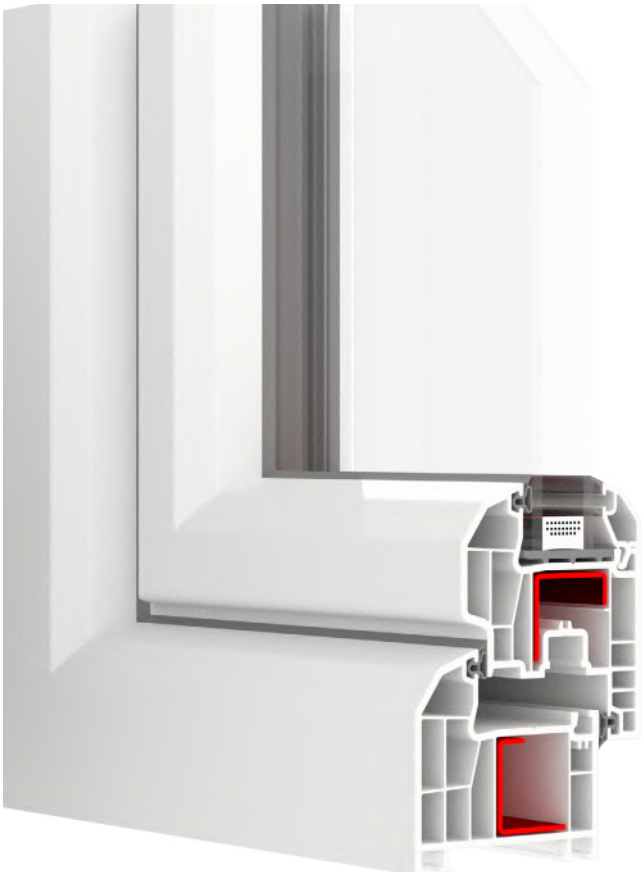


7000 series

The A-Class 7000 system is designed for clients who desire a fusion of modern elegance, practicality, and functionality. It guarantees the utmost comfort and significantly enhances the quality of life for all users.

5 chambers
Featuring five-chamber technology, this system is engineered for superior thermal and sound insulation.

2 gaskets
Two gaskets ensure excellent windproofing, optimal wind protection, and superior sound insulation.

Triple glass
Available with single glass of 4mm, two-layer 20mm and 24mm glass and triple 30mm glass.

70mm width
Our 70mm width uPVC profile offers exceptional durability, energy efficiency, and a sleek design.

CE ift ROSENHEIM **Quality and certified**

Standard colors of our uPVC profiles

All other colors can be made to order



White | Anthracite | Golden Oak | Dark Oak | Nussbaum | Jet Black | Mahogany

Why to choose our products?

Our PVC window and door systems are manufactured using advanced technology and provide an excellent level of acoustic and thermal insulation, achieving the highest quality standards available.

- Environment Friendly
- Easy Installation
- Cost Effective
- Noise Reduction
- Can be recycled
- Less Maintenance
- Fire Retardant
- Long life
- Thermal Insulation
- Modern design


Premium uPVC profiles
Created from high-quality raw materials

Innovation
Enhanced durability and energy efficiency for construction needs


Reliability
Our uPVC profiles are designed for unmatched reliability

Scan code and read more informations about this uPVC profile series.


BF 7001
Frame profile

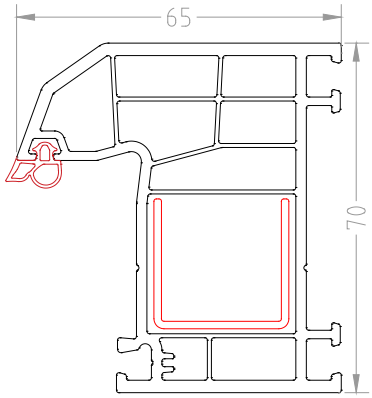


BF 7011
Sash profile

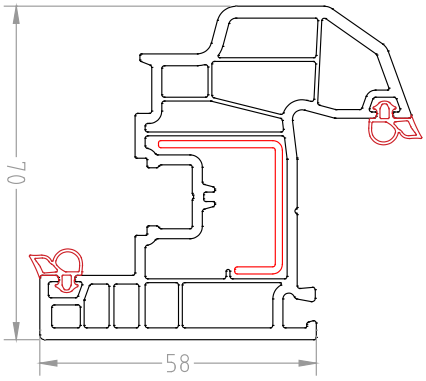


BF 7021
Mullion (T-bar) profile

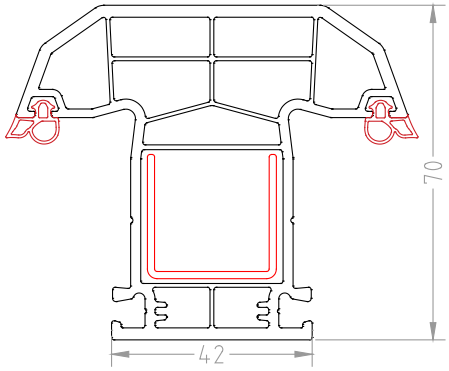


BF 6031
False mullion profile

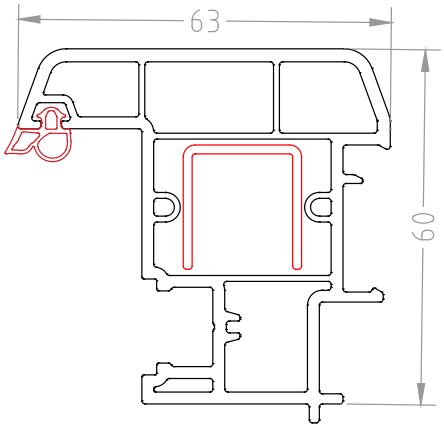


BF 7033
In turn door sash profile

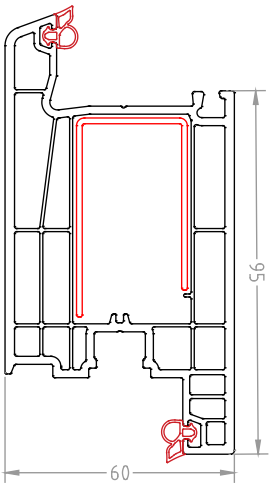


BF 6041
In turn door sash profile

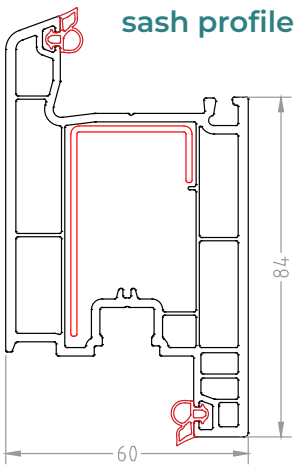


BF 6051
Outward opening door sash profile

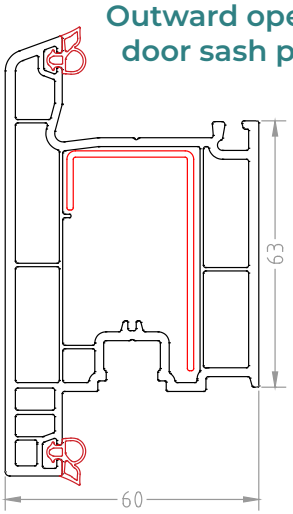


BF 7053
Single glazing bead
4 mm

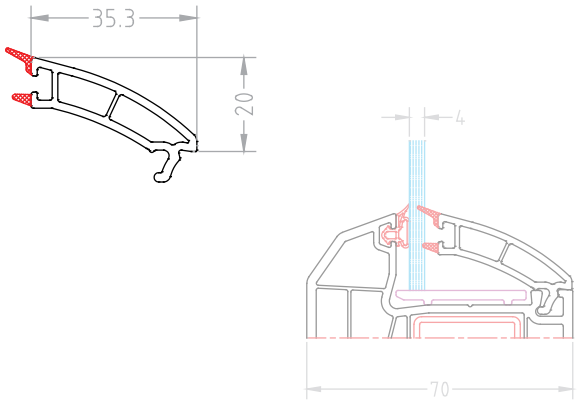


BF 7052
Dobule glazing bead
20 mm

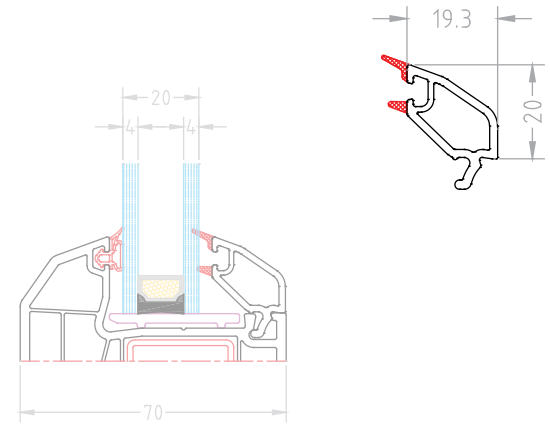

BF 7051
Double glazing bead
24 mm

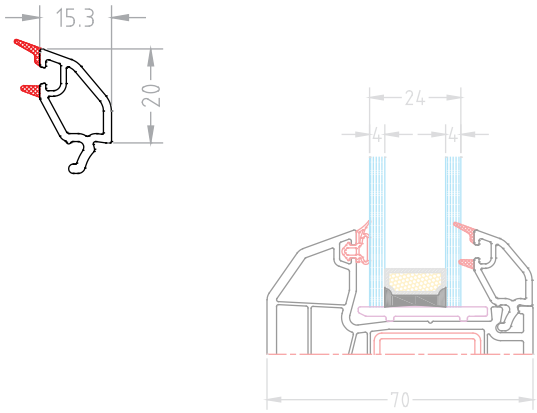

BF 7054
Triple glazing bead
30 mm

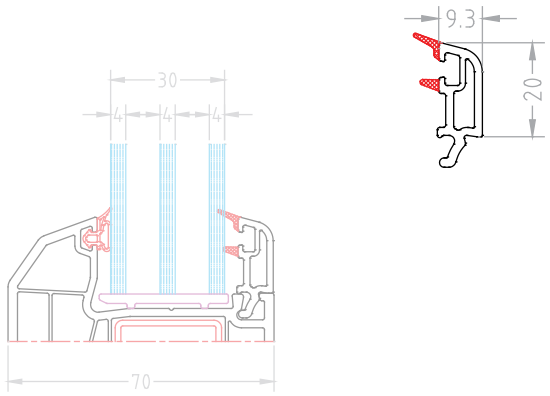




Glazing Beads for uPVC Windows and Doors


Glazing beads are crucial components in uPVC windows and doors, ensuring the glass panes are securely held in place while providing a neat and finished appearance. These beads are typically made from the same uPVC material as the window or door frames, ensuring a seamless and cohesive look.

Durability *Low Maintenance* *Energy Efficiency*


BF 5035
Profile extension
70*100mm

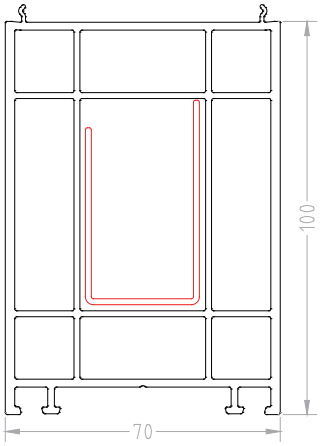


BF 5031
Profile extension
70*25mm

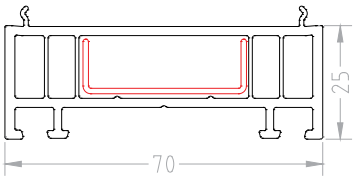


BF 7707
Treshold




BF 7210
Connecting pillar




BF 5025
Additional cornice part - *Adaptor*




BF 8536
Window Drainboard



BF 7208
Blind box extension



BF 7209
Angle connection pipe




BF 7708
Treshold cap 70




BF 7713
False mullion cap 70




BF 7710
Pipe adaptor




OB 0097
Wide T-bar coupling 70




OB 0034
Narrow T-bar coupling 60



BF 7202
Connecting molding




Iron reinforcement
Can be used for:
BF 7001 Frame profile and
BF 7021 Mullion (T-bar) profile

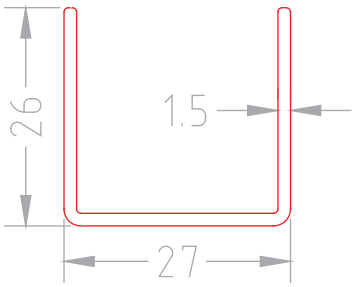


BF 405-10 *(Thickness 1.0mm)* **BF 405-12** *(Thickness 1.2mm)* **BF 405-15** *(Thickness 1.5mm)*

Iron reinforcement
Can be used for:
BF 6041 Door sash
BF 6051 Outward door sash

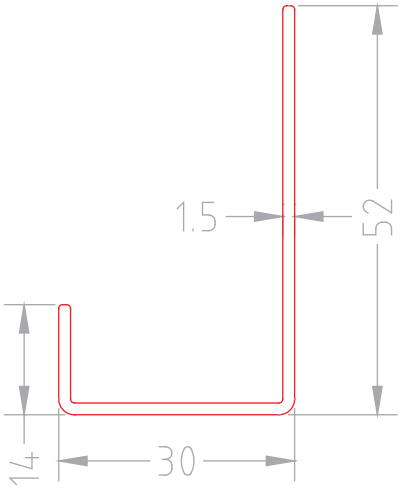


BF 403-10 *(Thickness 1.0mm)* **BF 403-12** *(Thickness 1.2mm)* **BF 403-15** *(Thickness 1.5mm)*

Iron reinforcement
Can be used for:
BF 6031 False mullion profile

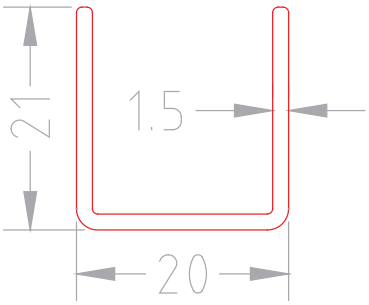


BF 404-10 *(Thickness 1.0mm)* **BF 404-12** *(Thickness 1.2mm)* **BF 404-15** *(Thickness 1.5mm)*

Iron reinforcement
Can be used for:
BF 7011 Sash profile




BF 406-10 *(Thickness 1.0mm)* **BF 406-12** *(Thickness 1.2mm)* **BF 406-15** *(Thickness 1.5mm)*

Iron reinforcement
Can be used for:
BF 7033 In turn door sash
BF 5035 Profile extension 100mm

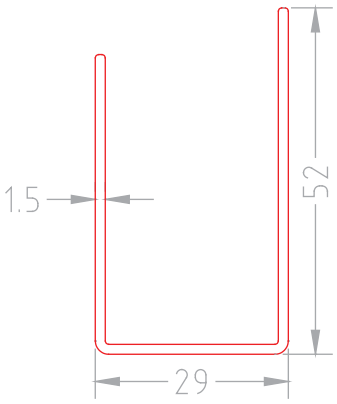


BF 407-10 *(Thickness 1.0mm)* **BF 407-12** *(Thickness 1.2mm)* **BF 407-15** *(Thickness 1.5mm)*

Iron reinforcement
Can be used for:
BF 5031 Profile extension 25mm

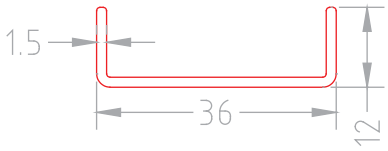


BF 408-10 *(Thickness 1.0mm)* **BF 408-12** *(Thickness 1.2mm)* **BF 408-15** *(Thickness 1.5mm)*


DOOR SYSTEM
Application of frame and door sash

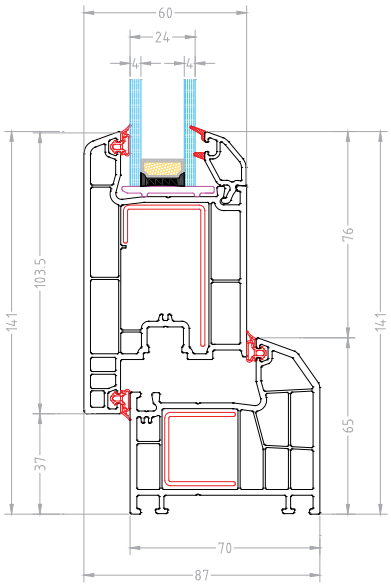


WINDOW SYSTEM
Application of frame and window sash

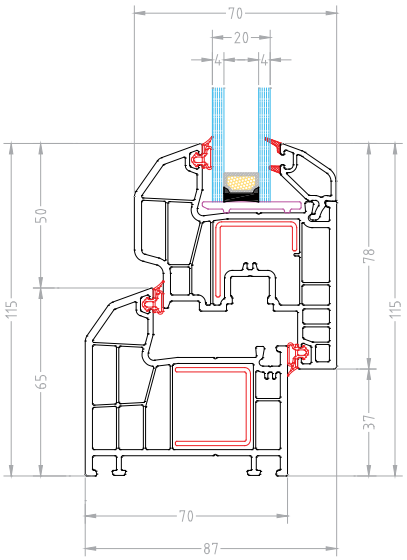


DOOR SYSTEM
Application of frame and outward opening door sash

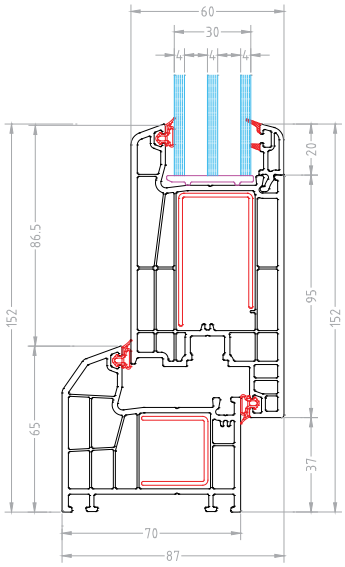


WINDOW SYSTEM
Application of sash and false mullion profile

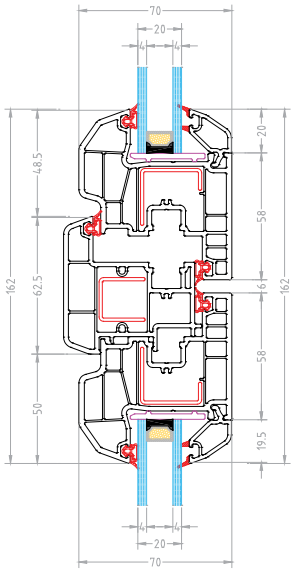


WINDOW SYSTEM
Application of sash and Mullion (T-bar) profile

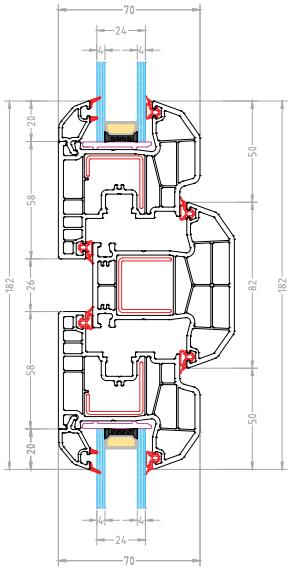


WINDOW SYSTEM
Application of frame, sash and connecting pillar (90°)

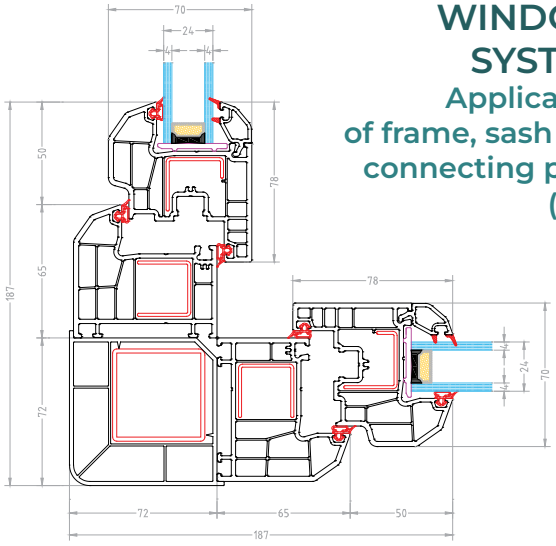


WINDOW SYSTEM
Application of frame extension 25mm

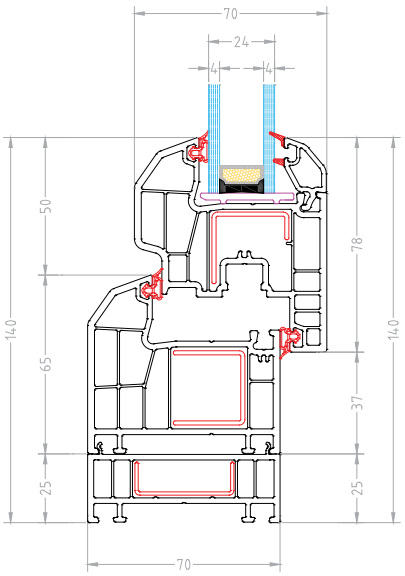


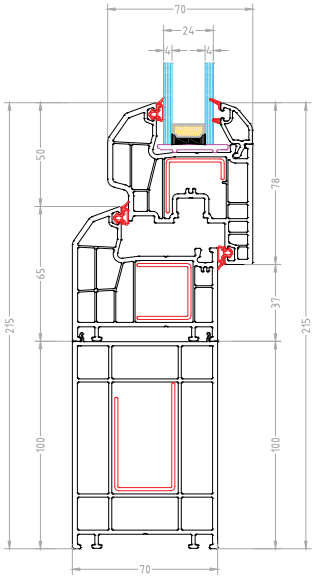

WINDOW SYSTEM
Application of frame extension 100mm


DOOR SYSTEM
Application of 24mm door panel

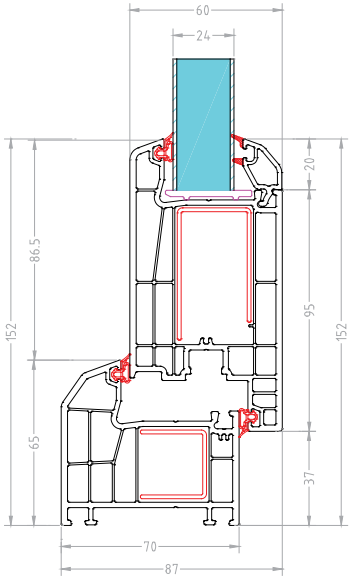


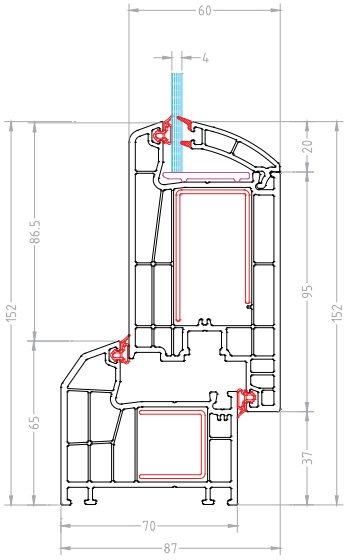

DOOR SYSTEM
Application of single glass (4mm)


DOOR SYSTEM
Application of door sash with false mullion

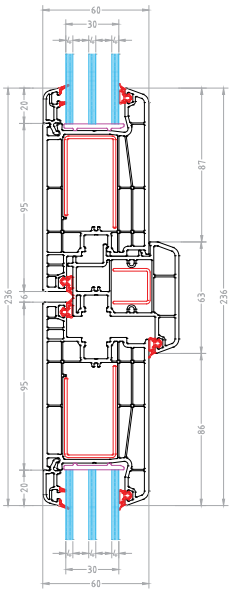

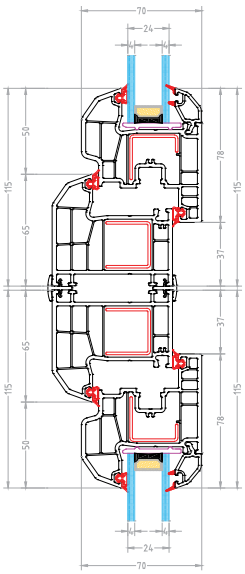


WINDOW SYSTEM
Application of connection molding

WINDOW SYSTEM
Application of additional cornice part on the wall

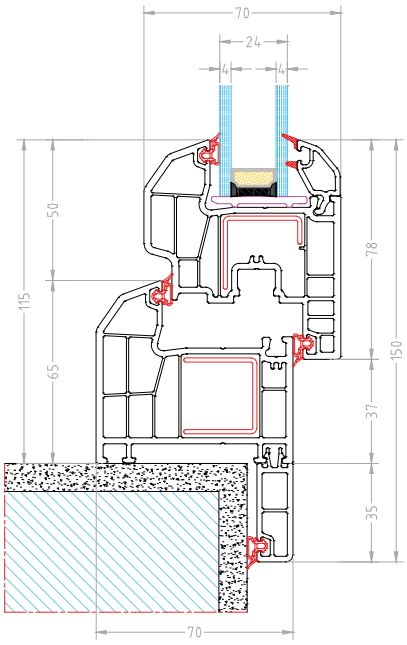

WINDOW SYSTEM
Drainage view

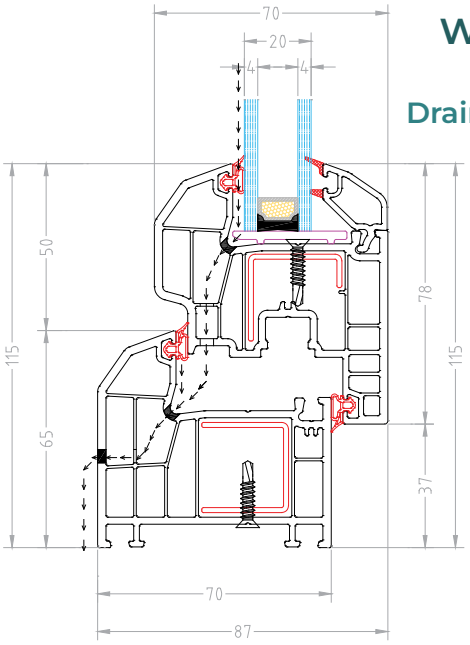

WINDOW SYSTEM
Application of outside ALU window sill and inside PVC window sill

