

8500 NL

Designed with superior thermal insulation properties, making it an ideal choice for energy-efficient homes and buildings. The 120mm width allows for multiple chambers within the profile, reducing heat transfer and maintaining optimal indoor temperatures.

Robust design
Featuring 120mm width technology, this system is engineered for superior thermal and sound insulation.

3 gaskets
Three levels of ventilation ensure excellent windproofing, optimal wind protection, and superior sound insulation.

Triple glass
Available with double glass of 24mm, three-layer 36mm glass and triple 44mm glazing bead.

120mm width
Our 120mm width uPVC profile offers exceptional durability, energy efficiency, and a sleek design.

CE ift ROSENHEIM **Quality and certified**

Standard colors of our uPVC profiles

All other colors can be made to order



White | Anthracite | Golden Oak | Dark Oak | Nussbaum | Jet Black | Mahogany

Why to choose our products?

Our PVC window and door systems are manufactured using advanced technology and provide an excellent level of acoustic and thermal insulation, achieving the highest quality standards available.

- Environment Friendly
- Easy Installation
- Cost Effective
- Noise Reduction
- Can be recycled
- Less Maintenance
- Fire Retardant
- Long life
- Thermal Insulation
- Modern design


Premium uPVC profiles
Created from high-quality raw materials

Innovation
Enhanced durability and energy efficiency for construction needs


Reliability
Our uPVC profiles are designed for unmatched reliability

Scan code and read more informations about this uPVC profile series.


BF 1201
Frame profile
Frame with cornice

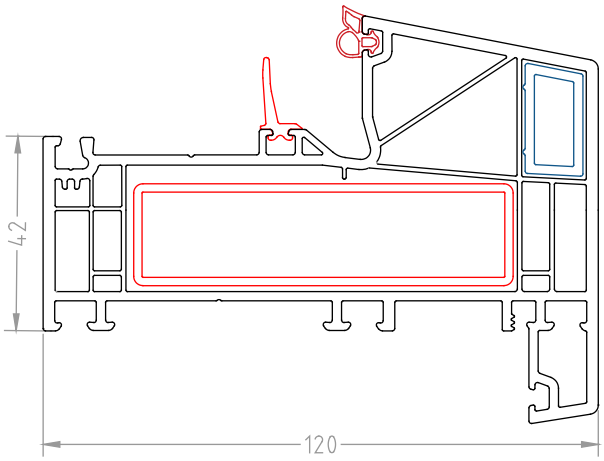


BF 1202
Frame profile
Frame without cornice

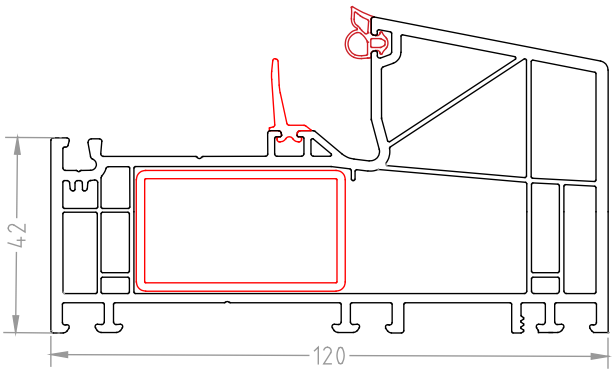


BF 1203
Mullion (T-bar) profile

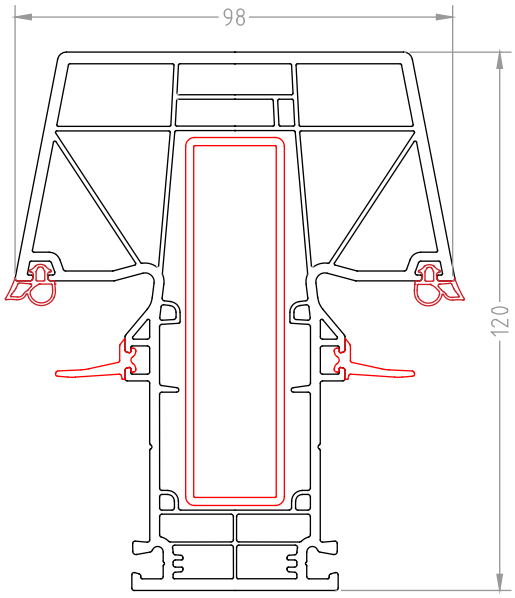


BF 1204
False mullion profile

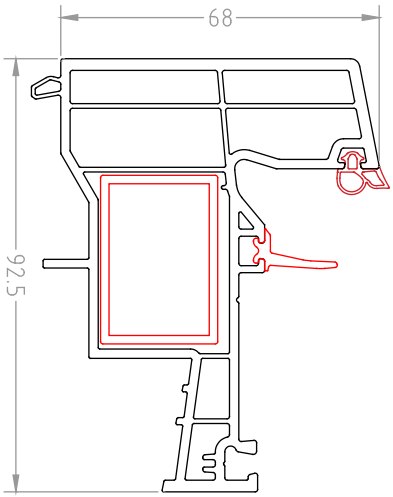


BF 8583
In turn door sash profile

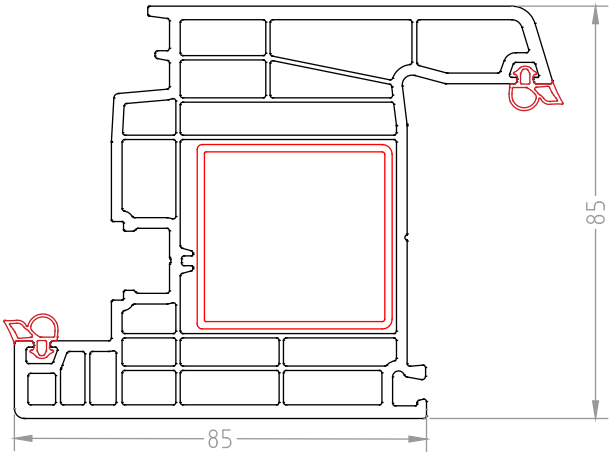


BF 8584
Outward opening door sash profile

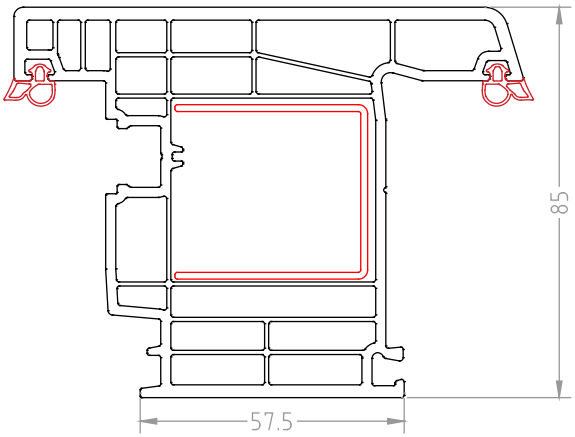


BF 8582
Sash profile

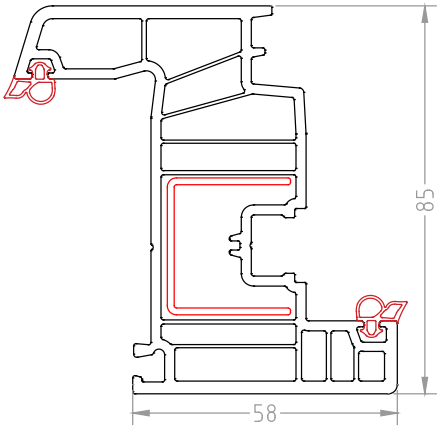


BF 8586
False mullion profile

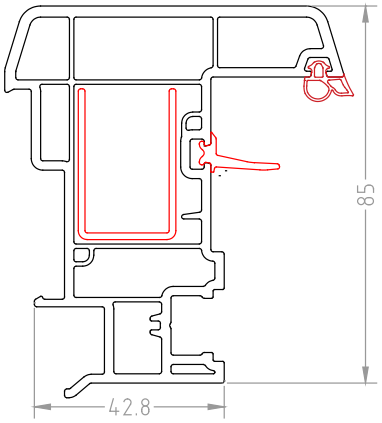

BF 1203
Mullion (T-bar) profile

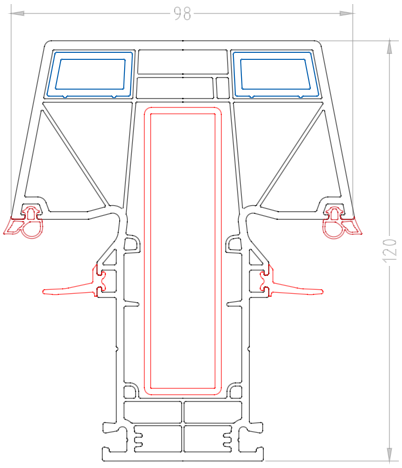


BF 1201
Frame profile
Frame with cornice

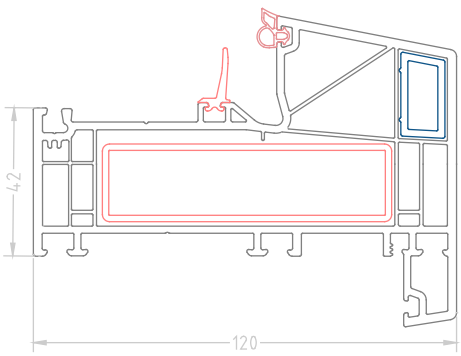


These two profiles can also include additional aluminum reinforcements when used in the construction of larger windows or doors.


Aluminium




BF 8509
Double glazing bead
24 mm

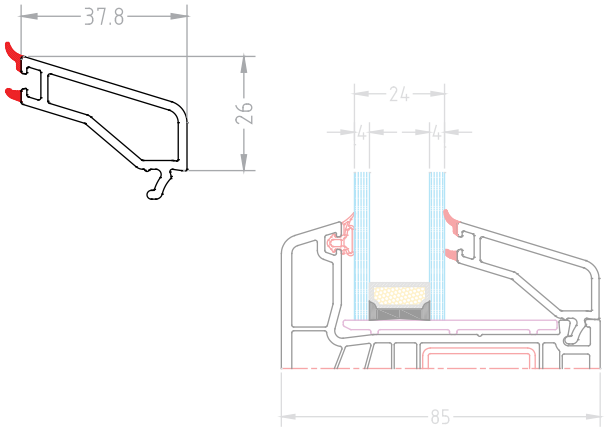


BF 7609
Triple glazing bead
32 mm

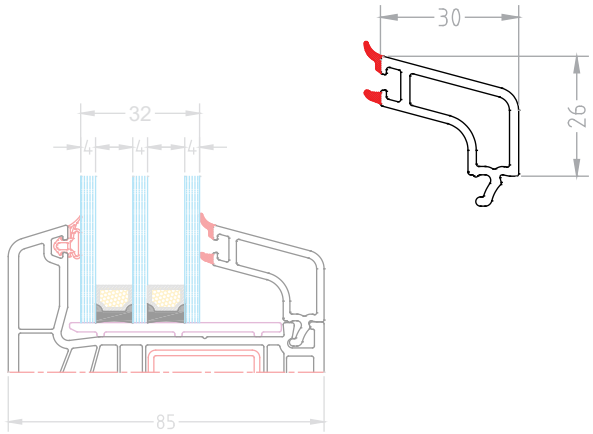


BF 8508
Triple glazing bead
36 mm

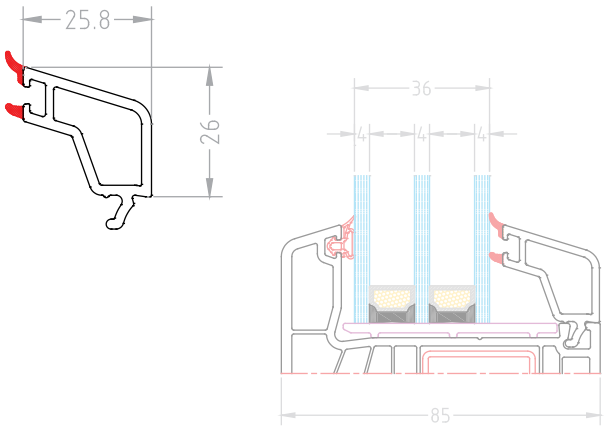

BF 8510
Triple glazing bead
44 mm

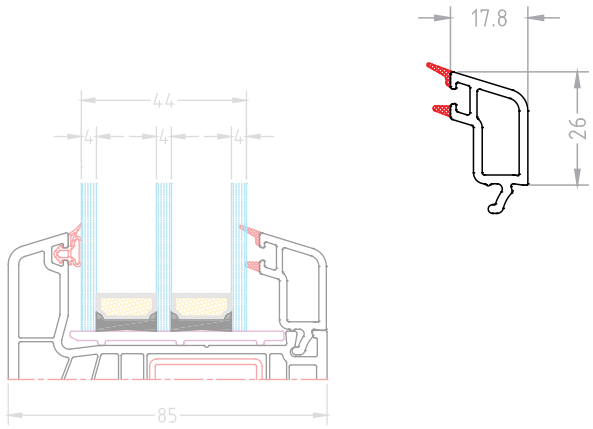

BF 7054
Triple glazing bead
52.50 mm

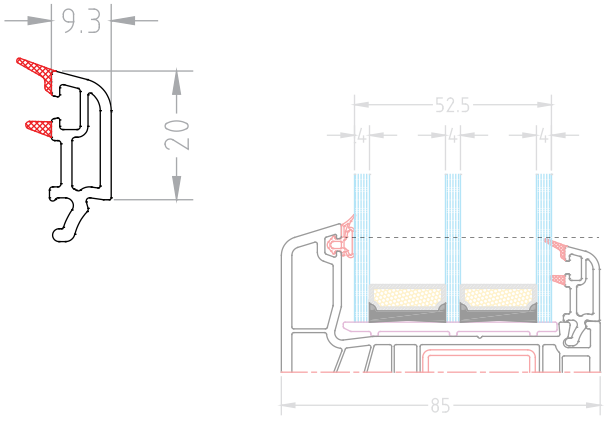


Glazing Beads for uPVC Windows and Doors

Glazing beads are crucial components in uPVC windows and doors, ensuring the glass panes are securely held in place while providing a neat and finished appearance. These beads are typically made from the same uPVC material as the window or door frames, ensuring a seamless and cohesive look.

—

Durability
Low Maintenance
Energy Efficiency


BF 7625
Profile extension
76*25mm




BF 8589
False mullion cap




OKBT 85
Mullion (T-bar) coupling 85




BF 5025
Additional cornice part - *Adaptor*




BF 8536
Window Drainboard



BF 7208
Blind box extension



BF 7202
Connecting molding




Iron reinforcement
Can be used for:
BF 1201 Frame Profile and
BF 1203 Mullion (T-bar) profile




BF 425-12 *(Thickness 1.2mm)* **BF 425-15** *(Thickness 1.5mm)* **BF 425-20** *(Thickness 2.0mm)*

Iron reinforcement
Can be used for:
BF 1204 False mullion profile




BF 423-12 *(Thickness 1.2mm)* **BF 423-15** *(Thickness 1.5mm)* **BF 423-20** *(Thickness 2.0mm)*

Aluminium reinforcement
Can be used for:
BF 1201 Frame Profile and
BF 1203 Mullion (T-bar) profile




BF 424-12 *(Thickness 1.2mm)* **BF 424-15** *(Thickness 1.5mm)* **BF 424-20** *(Thickness 2.0mm)*

Iron reinforcement
Can be used for: **BF 8503**, **BF 8504**, **BF 8523**, **BF 8583** and **BF 8584** Door sash

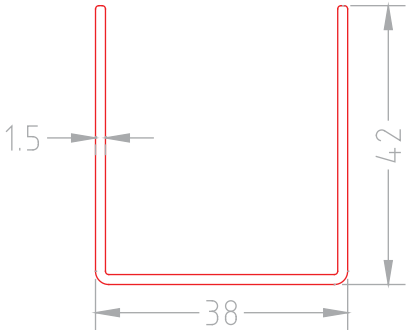


BF 410-12 *(Thickness 1.2mm)* **BF 410-15** *(Thickness 1.5mm)* **BF 410-20** *(Thickness 2.0mm)*

Iron reinforcement
BF 8501, **BF 8521** and **BF 8581** Frame, **BF 8502**, **BF 8522** and **BF 8582** Sash, and **BF 8545** Frame with cornice

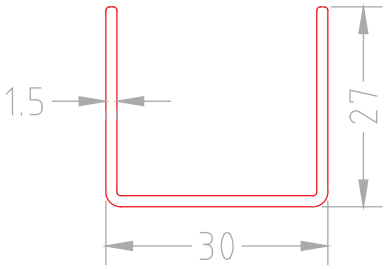

BF 409-12 *(Thickness 1.2mm)* **BF 409-15** *(Thickness 1.5mm)* **BF 409-20** *(Thickness 2.0mm)*

Iron reinforcement
Can be used for:
BF 1202 Frame Profile




BF 426-12 *(Thickness 1.2mm)* **BF 426-15** *(Thickness 1.5mm)* **BF 426-20** *(Thickness 2.0mm)*




Steel reinforcement
Our uPVC profiles come with the option for steel reinforcement and a variety of multi-point locking systems places that make them among the safest and securest systems on the market.


WINDOW SYSTEM
Application of frame and sash
(without cornice)

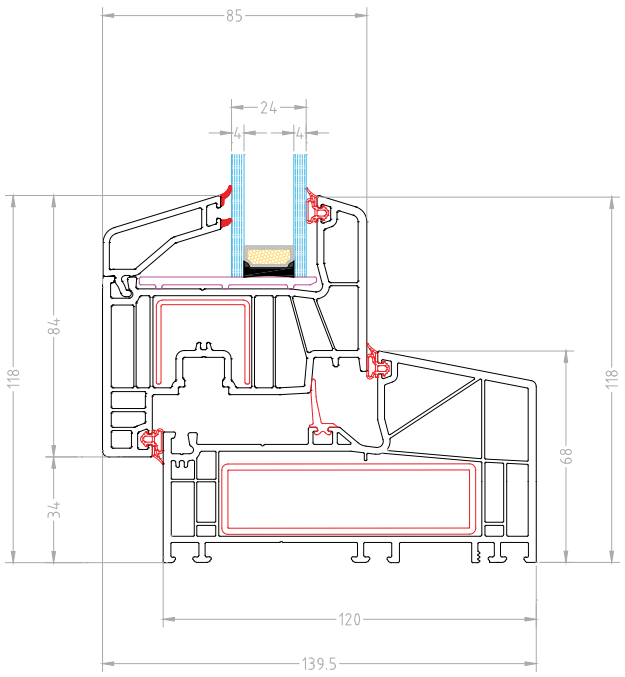


WINDOW SYSTEM
Application of frame and sash
(with cornice)

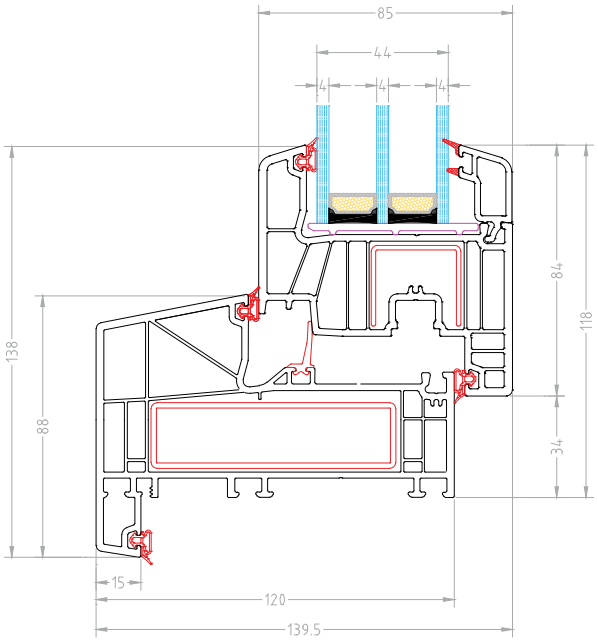


DOOR SYSTEM
Application of frame
(with cornice)

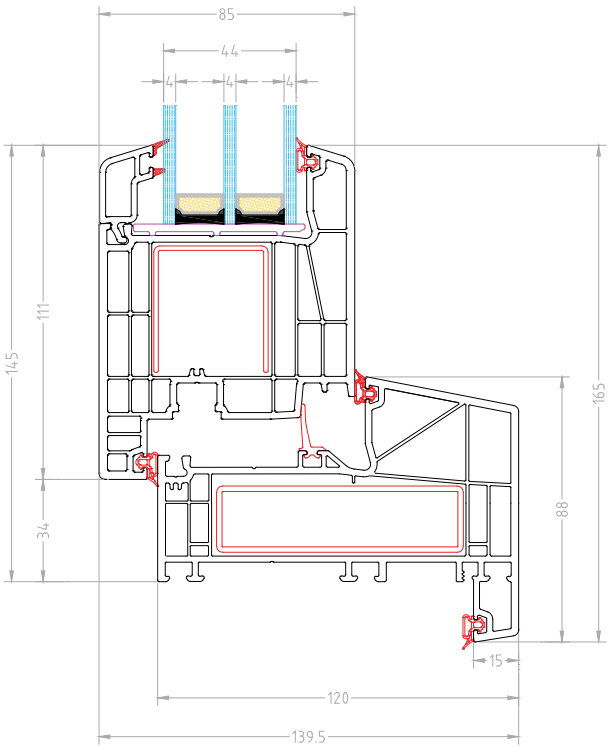


DOOR SYSTEM
Application of frame
(without cornice)

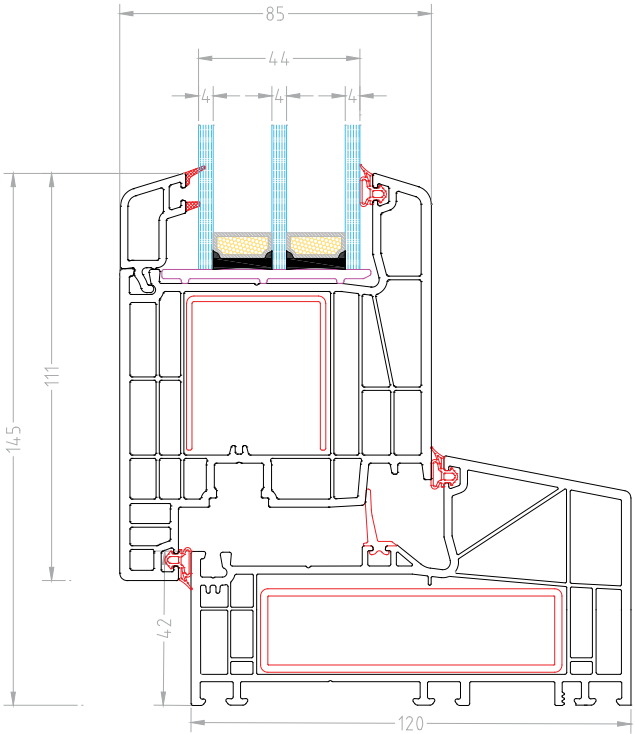

NL SYSTEM
Application of Mullion (T-bar) and False mullion profile

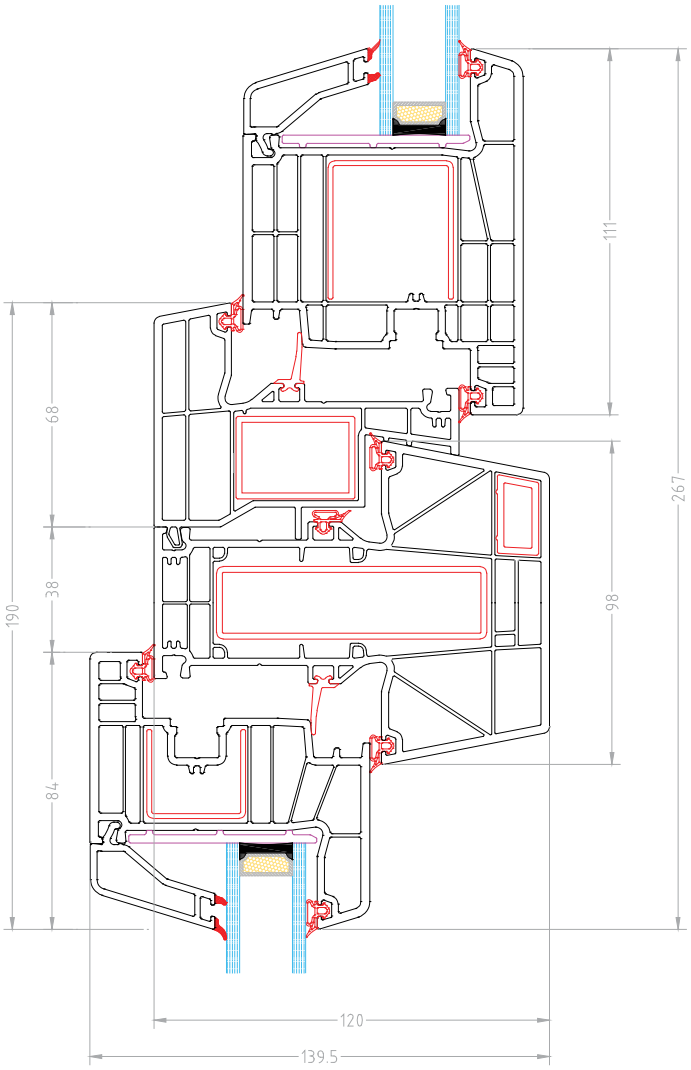


DOOR SYSTEM
Application of false mullion profile

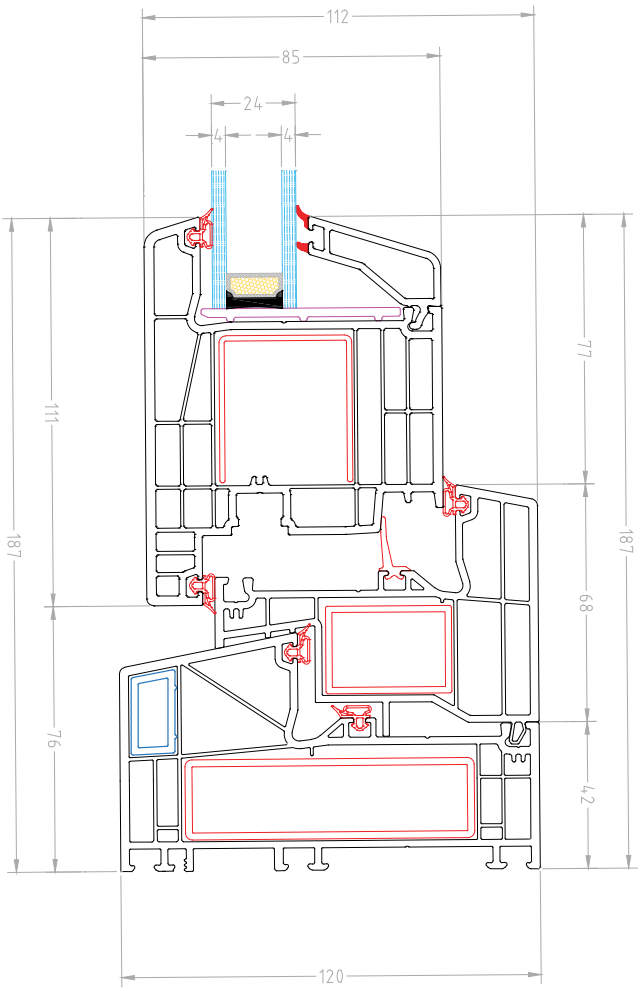

WINDOW AND DOOR SYSTEM

Application of window and door profiles with NL 8500 series

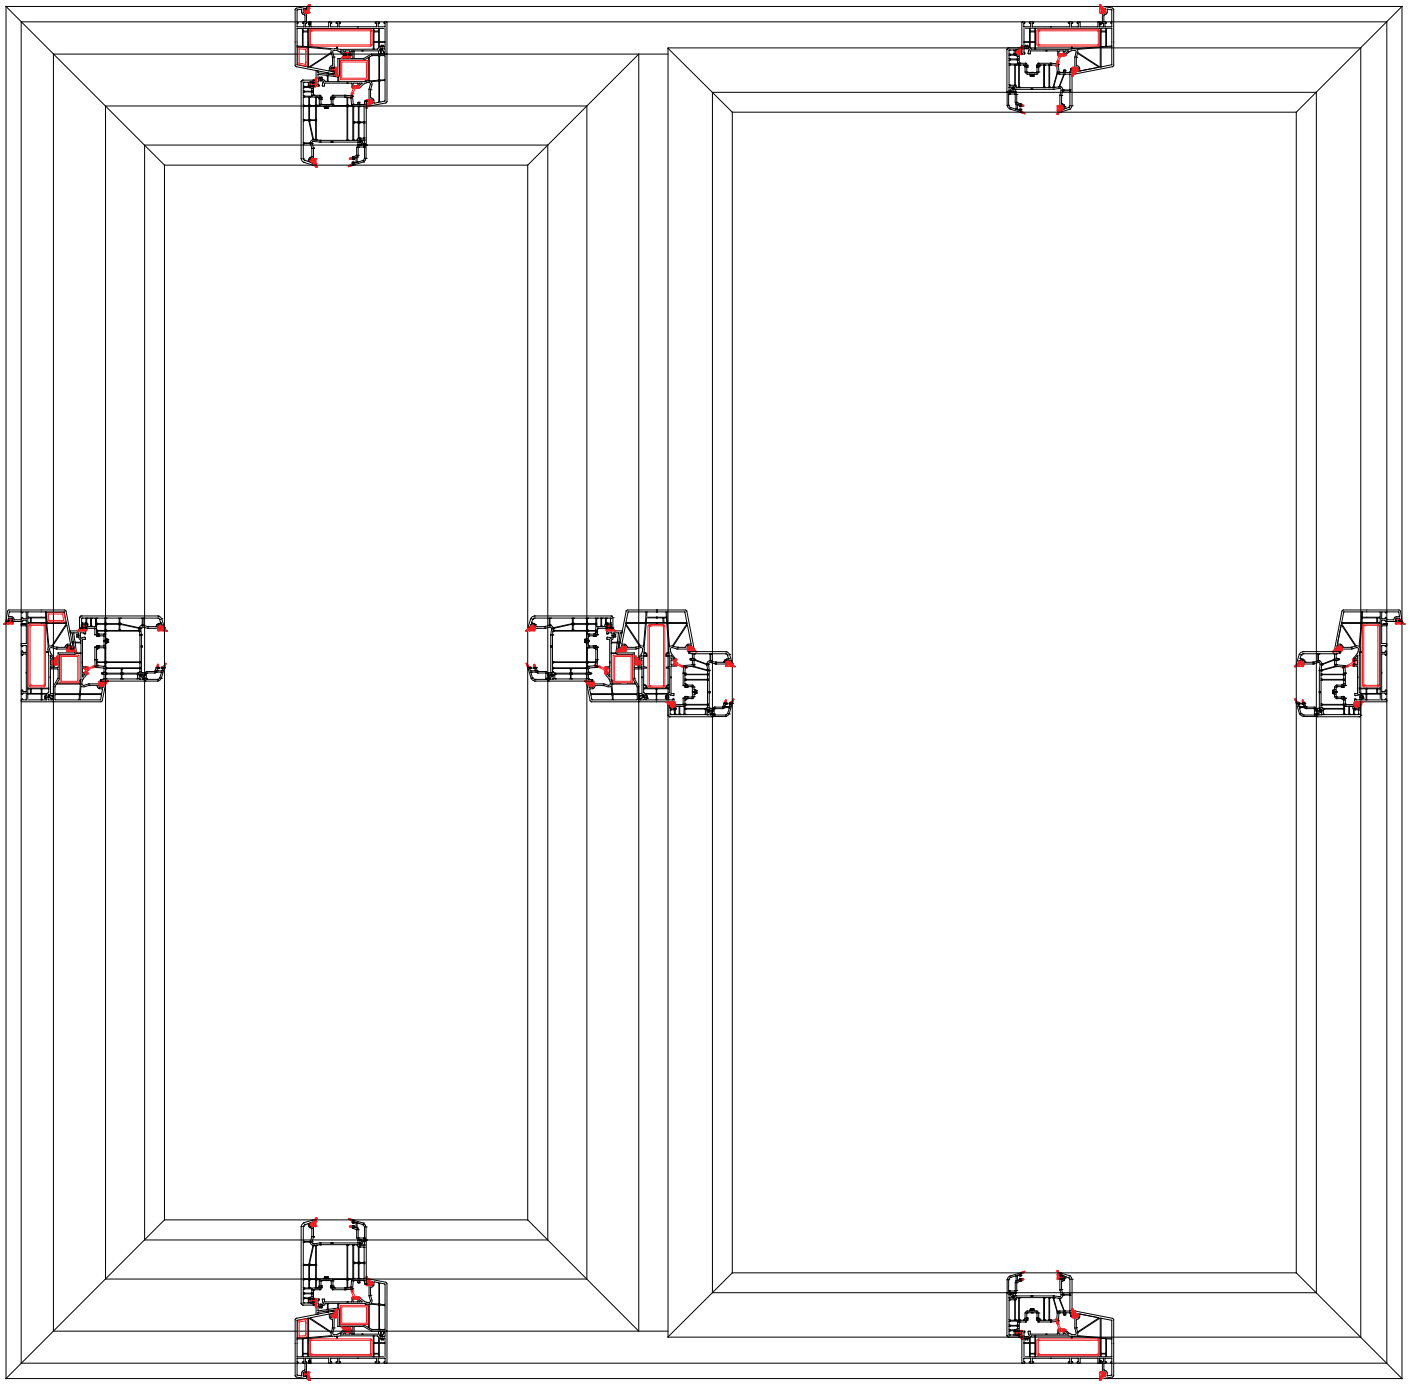



Long Lifespan

With proper installation, uPVC profiles can last 20–40 years or more, maintaining their appearance and performance over time.