

Weather Resistance

uPVC profiles are highly resistant to weathering, including rain, wind, and sunlight, making them ideal for outdoor applications without fading or corroding.



8500 Platinum

The 8500 Platinum system offers modern elegance, practicality, and functionality, ensuring exceptional comfort and enhancing users' quality of life.

7 chambers
Featuring seven-chamber technology, this system is engineered for superior thermal and sound insulation.

3 gaskets
Three levels of ventilation ensure excellent windproofing, optimal wind protection, and superior sound insulation.

Triple glass
Available with double glass of 24mm, three-layer 36mm glass and triple 44mm glazing bead.

85mm width
Our 85mm width uPVC profile offers exceptional durability, energy efficiency, and a sleek design.

Quality and certified

Standard colors of our uPVC profiles
All other colors can be made to order



White | Anthracite | Golden Oak | Dark Oak | Nussbaum | Jet Black | Mahogany

Why to choose our products?
Our PVC window and door systems are manufactured using advanced technology and provide an excellent level of acoustic and thermal insulation, achieving the highest quality standards available.

- Environment Friendly
- Easy Installation
- Cost Effective
- Noise Reduction
- Can be recycled
- Less Maintenance
- Fire Retardant
- Long life
- Thermal Insulation
- Modern design


Premium uPVC profiles
Created from high-quality raw materials

Innovation
Enhanced durability and energy efficiency for construction needs


Reliability
Our uPVC profiles are designed for unmatched reliability

Scan code and read more informations about this uPVC profile series.


BF 8501
Frame profile

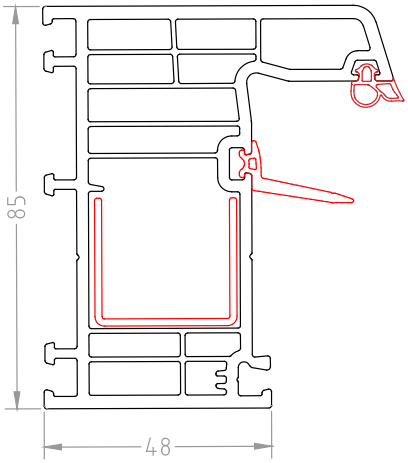


BF 8502
Sash profile

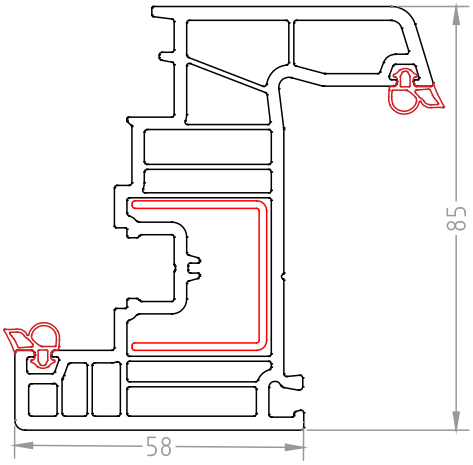


BF 8503
In turn door sash profile

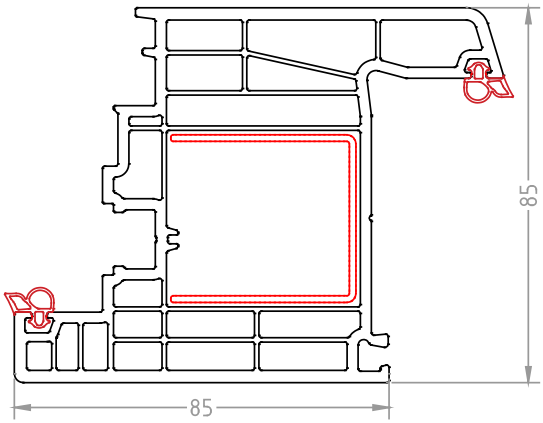


BF 8504
Outward opening door sash profile

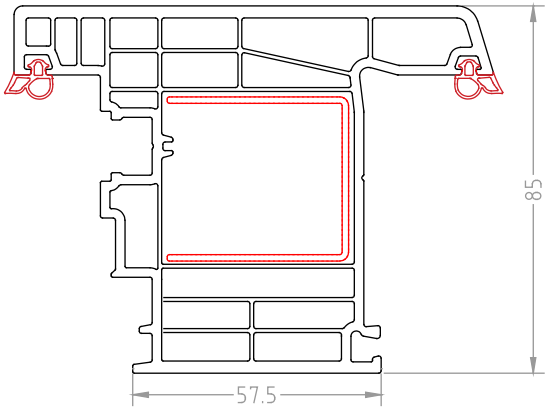


BF 8505
Mullion (T-bar) profile

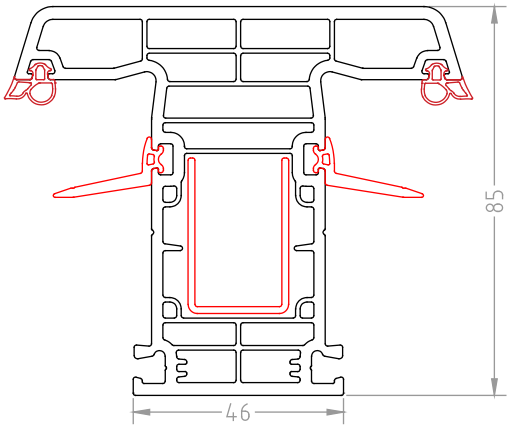


BF 8506
False mullion profile

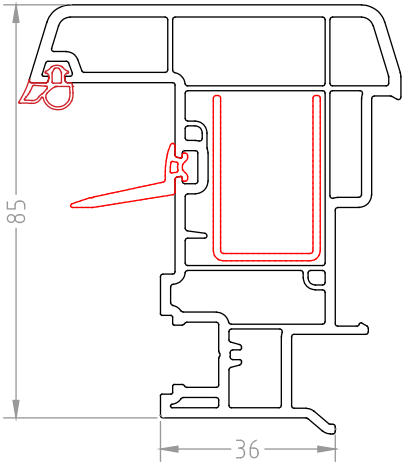


BF 8509
Double glazing bead
24 mm

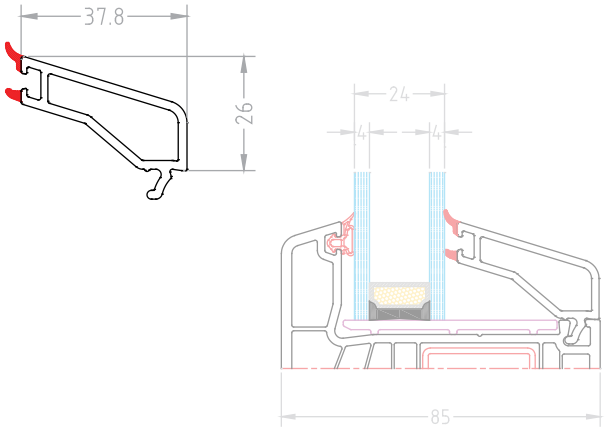


BF 7609
Triple glazing bead
32 mm

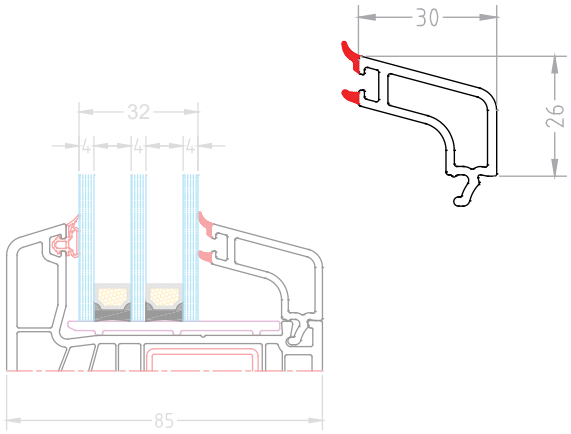


BF 8508
Triple glazing bead
36 mm

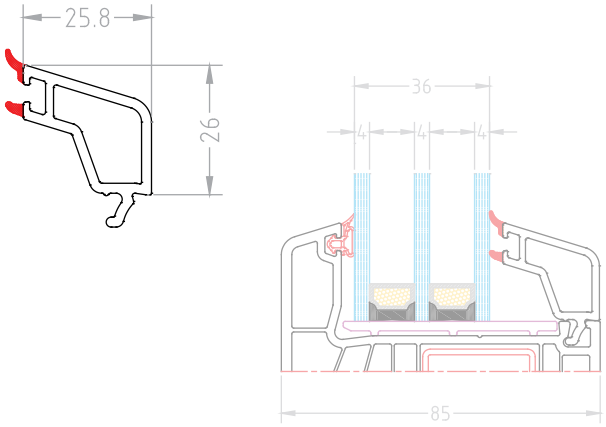

BF 8510
Triple glazing bead
44 mm

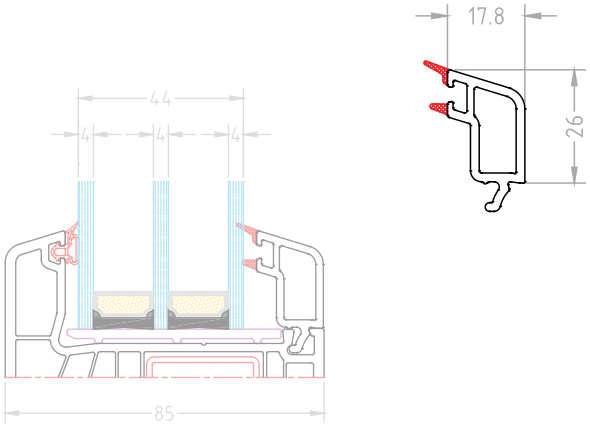

BF 7054
Triple glazing bead
52.50 mm

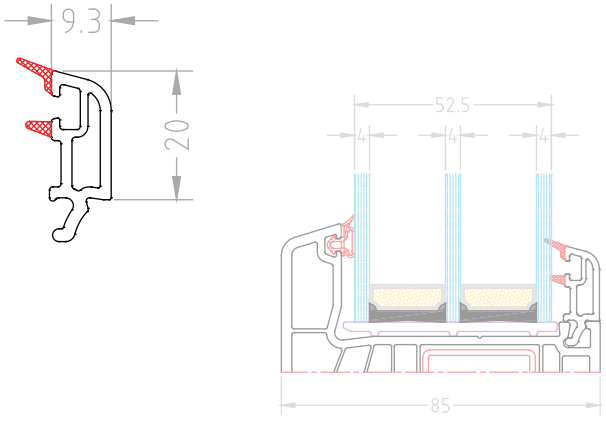


Glazing Beads for uPVC Windows and Doors

Glazing beads are crucial components in uPVC windows and doors, ensuring the glass panes are securely held in place while providing a neat and finished appearance. These beads are typically made from the same uPVC material as the window or door frames, ensuring a seamless and cohesive look.


—

Durability
Low Maintenance
Energy Efficiency


BF 8520
Profile extension
85*100mm

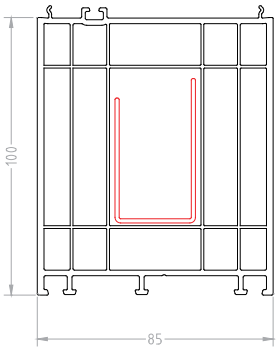


BF 8507
Profile extension
85*25mm




BF 8517
Treshold




BF 8535
Connecting pillar




BF 5025
Additional cornice part - *Adaptor*



BF 8536
Window Drainboard



BF 7208
Blind box extension




BF 8518
Treshold cap 85




BF 8519
False mullion cap 85




OB 0121
Mullion (T-bar) coupling 85




BF 8531
Angle connection pipe




BF 8542
Pipe adaptor



BF 7202
Connecting molding




Iron reinforcement
Can be used for:
BF 8501, **BF 8521** and **BF 8581** Frame, **BF 8502**, **BF 8522** and **BF 8582** Sash, and **BF 8545** Frame with cornice

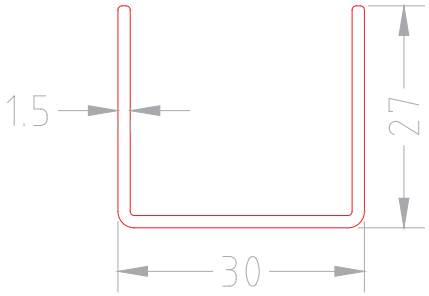


BF 409-12 *(Thickness 1.2mm)* **BF 409-15** *(Thickness 1.5mm)* **BF 409-20** *(Thickness 2.0mm)*

Iron reinforcement
Can be used for: **BF 8503**, **BF 8504**, **BF 8523**, **BF 8583** and **BF 8584** Door sash

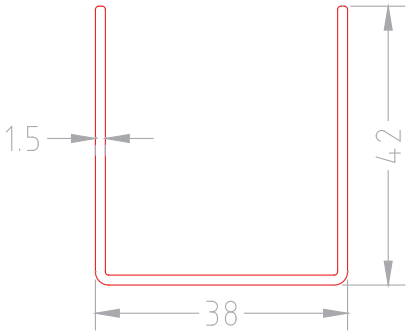


BF 410-12 *(Thickness 1.2mm)* **BF 410-15** *(Thickness 1.5mm)* **BF 410-20** *(Thickness 2.0mm)*

Iron reinforcement
Can be used for:
BF 8506, **BF 8526** and **BF 8586** False mullion profile

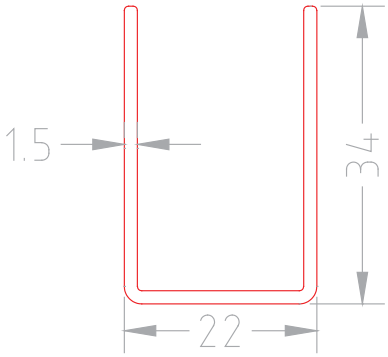


BF 411-12 *(Thickness 1.2mm)* **BF 411-15** *(Thickness 1.5mm)* **BF 411-20** *(Thickness 2.0mm)*

Iron reinforcement
Can be used for:
BF 8505, **BF 8525** and **BF 8585** Mullion (T-bar) profile

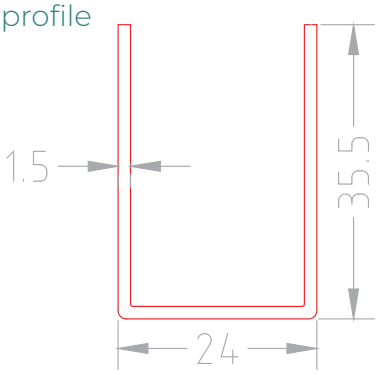


BF 414-12 *(Thickness 1.2mm)* **BF 414-15** *(Thickness 1.5mm)* **BF 414-20** *(Thickness 2.0mm)*

Iron reinforcement
Can be used for:
BF 8520 Profile extension 100mm

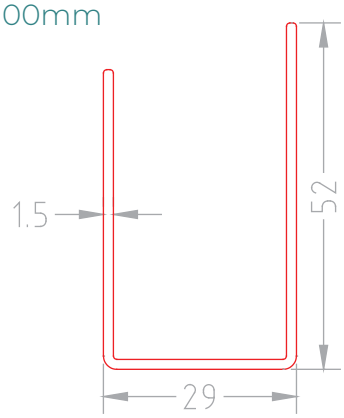


BF 407-12 *(Thickness 1.2mm)* **BF 407-15** *(Thickness 1.5mm)* **BF 407-20** *(Thickness 2.0mm)*

Iron reinforcement
Can be used for:
BF 8507 Profile extension 25mm

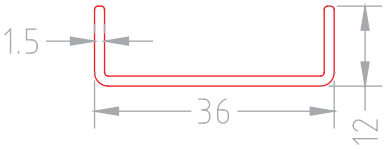


BF 408-12 *(Thickness 1.2mm)* **BF 408-15** *(Thickness 1.5mm)* **BF 408-20** *(Thickness 2.0mm)*

Iron reinforcement
Can be used for:
BF 8505, **BF 8525** and **BF 8585** Mullion (T-bar) profile




BF 415-12 *(Thickness 1.2mm)* **BF 415-15** *(Thickness 1.5mm)* **BF 415-20** *(Thickness 2.0mm)*

Iron reinforcement
Can be used for:
BF 8501, **BF 8521** and **BF 8581** Frame, **BF 8502**, **BF 8522** and **BF 8582** Sash, and **BF 8545** Frame with cornice

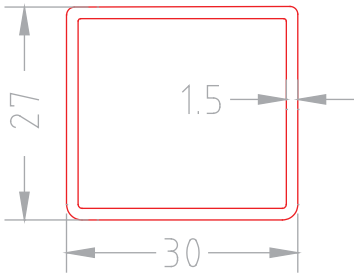


BF 413-12 *(Thickness 1.2mm)* **BF 413-15** *(Thickness 1.5mm)* **BF 413-20** *(Thickness 2.0mm)*

Iron reinforcement
Can be used for:
BF 8504, **BF 8523**, **BF 8583** and **BF 8584** Door sash

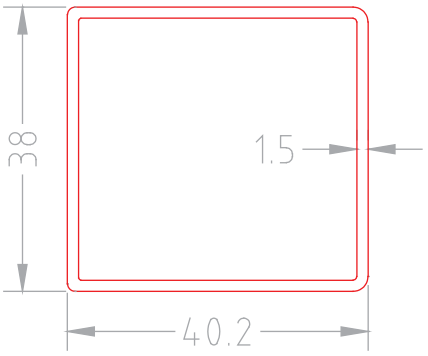


BF 416-12 *(Thickness 1.2mm)* **BF 416-15** *(Thickness 1.5mm)* **BF 416-20** *(Thickness 2.0mm)*


DOOR SYSTEM
Application of frame and door sash

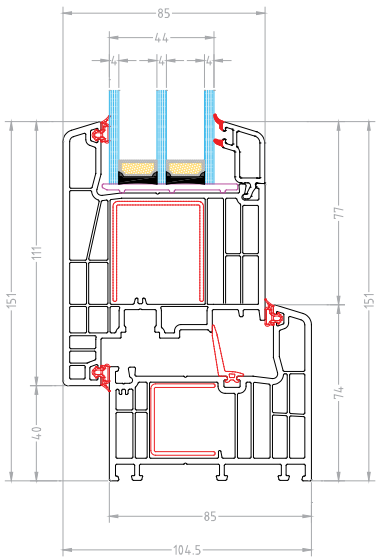


WINDOW SYSTEM
Application of frame and window sash

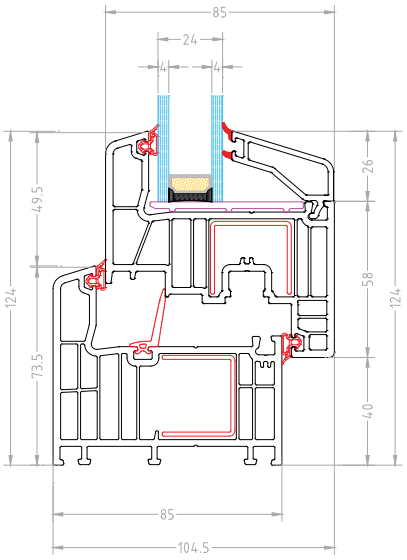


DOOR SYSTEM
Application of frame and outward opening window sash

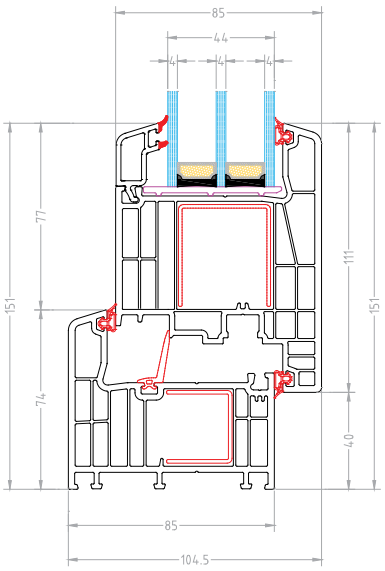


WINDOW SYSTEM
Application of sash and false mullion profile

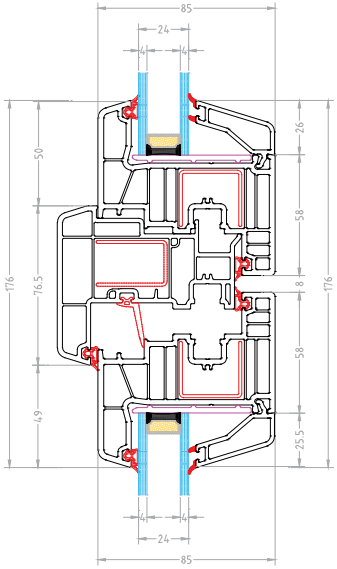


WINDOW SYSTEM
Application of sash and Mullion (T-bar) profile

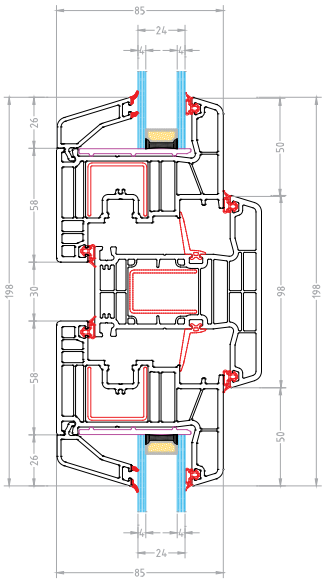


WINDOW SYSTEM
Application of frame and sash with connecting pillar

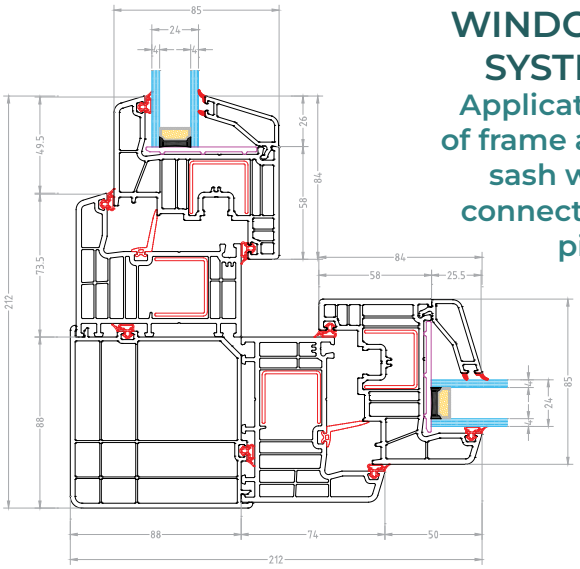


DOOR SYSTEM
Application of frame extension 25mm

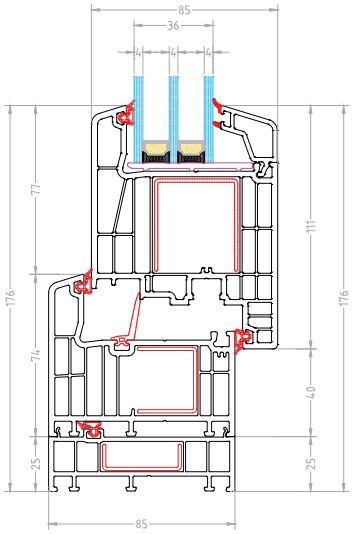


DOOR SYSTEM
Application of frame extension 100mm

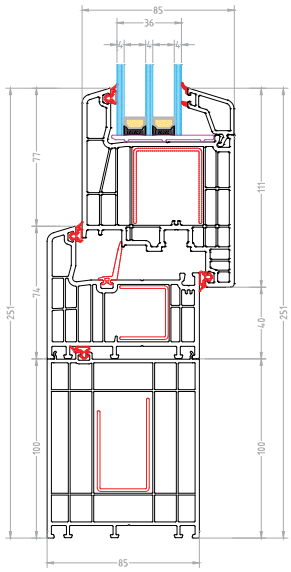


DOOR SYSTEM
Application of 24mm door panel

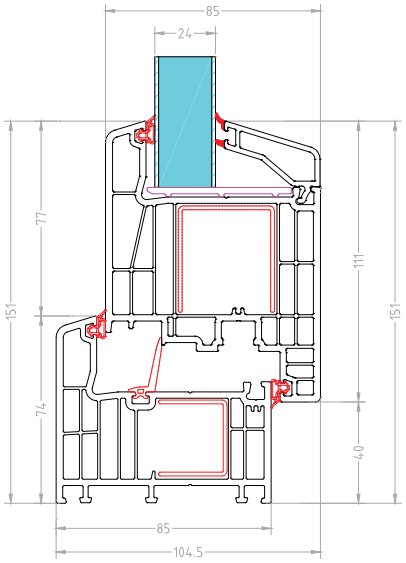


DOOR SYSTEM
Application of 36mm door panel

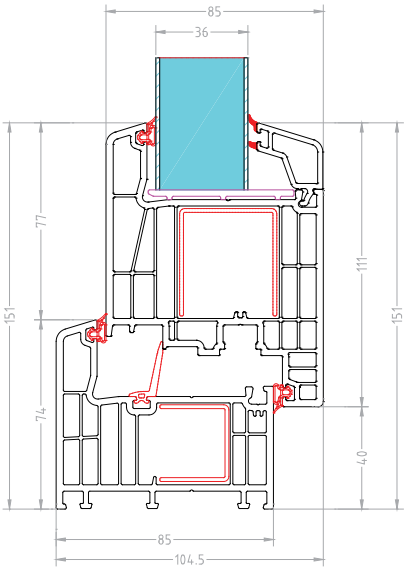


DOOR SYSTEM
Application of door sash treshold and drainboard

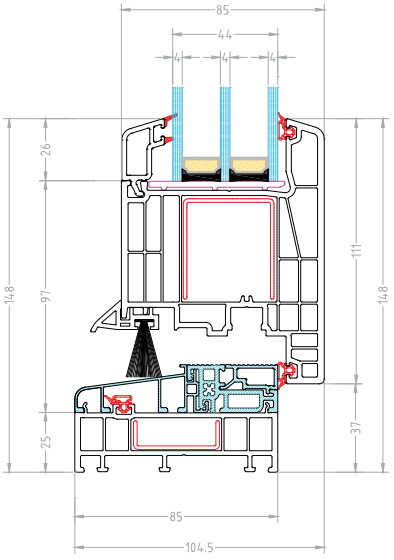


DOOR SYSTEM
Application of connection molding

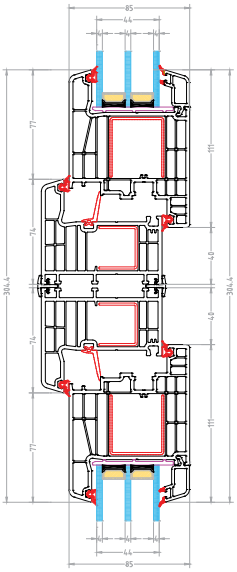


WINDOW SYSTEM
Application of additional cornice part on the wall

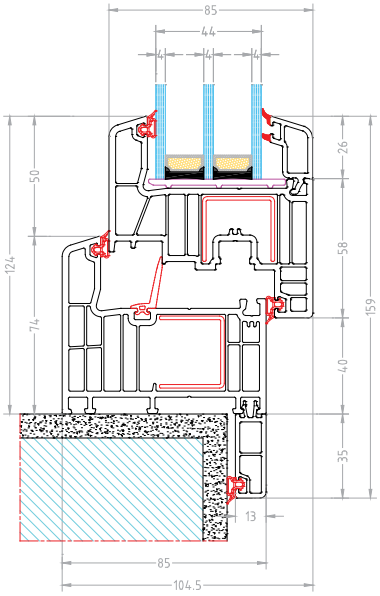

WINDOW SYSTEM
Drainage view

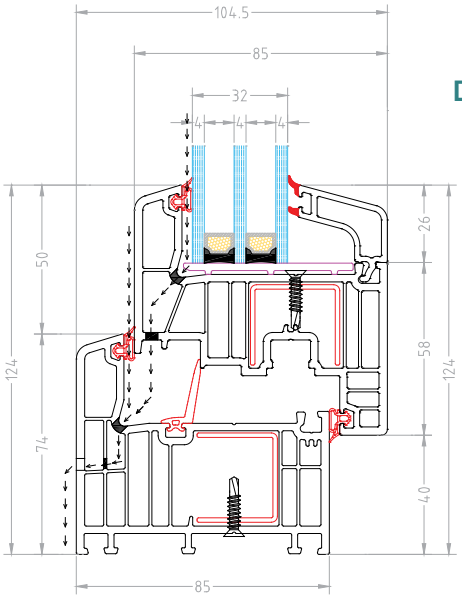

WINDOW SYSTEM
Application of outside ALU window sill and inside PVC window sill

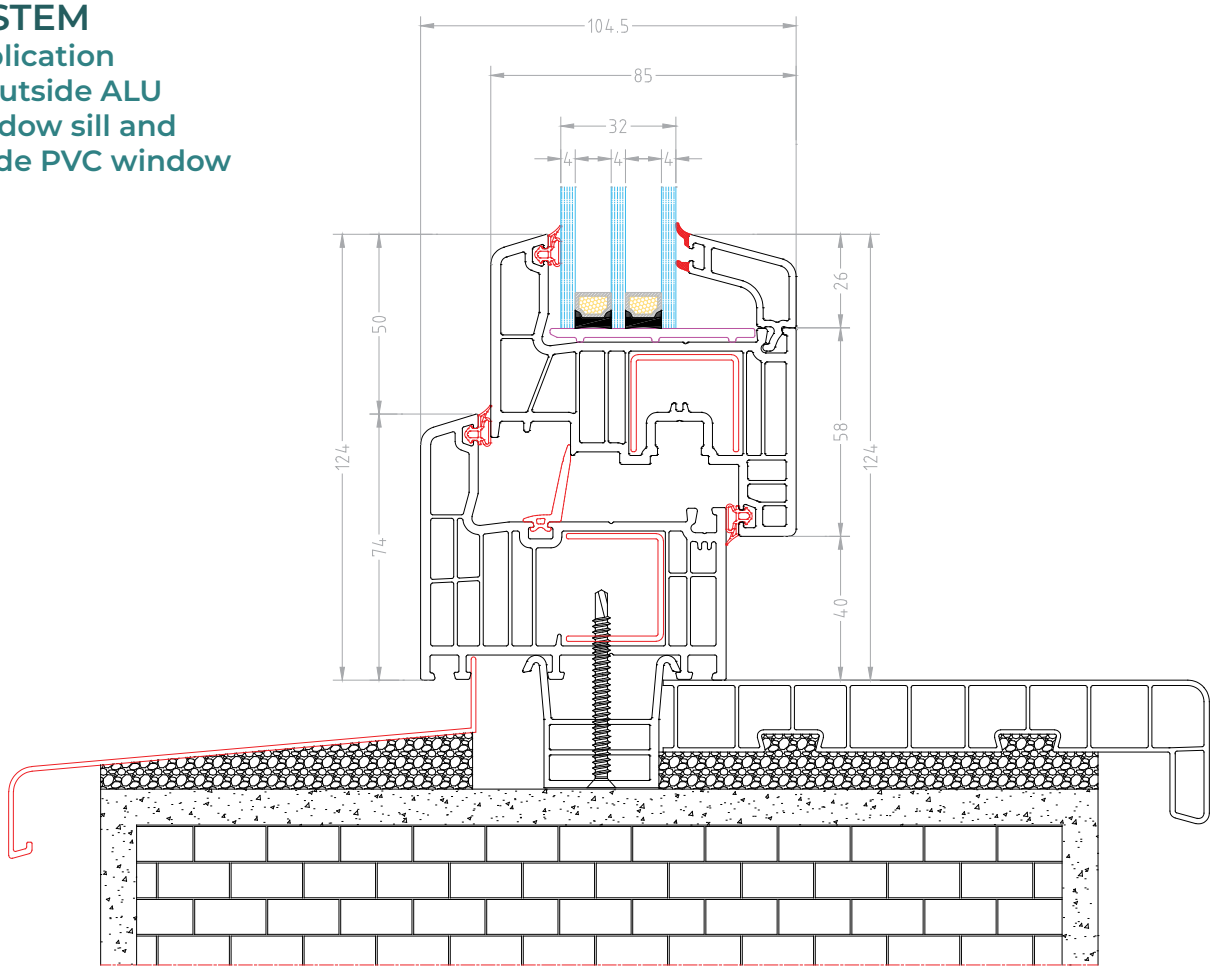

Sound Insulation

Thanks to their multi-chambered design and tight seals, uPVC profiles provide effective soundproofing, ideal for homes in noisy environments.

